Expanding Stacks & Queues

CS16: Introduction to Data Structures & Algorithms

Spring 2020

Outline

- Abstract data types
- Stacks
  - Capped-capacity
  - Expandable
- Amortized analysis
- Queues
  - Expandable queues

From Lecture 02

What is Running Time?

Asymptotic worst-case running time
=
Number of elementary operations
on worst-case input
as a function of input size n
when n tends to infinity

In CS "running time" usually means asymptotic worst-case running time…but not always!

we will learn about other kinds of running times

Abstract Data Types

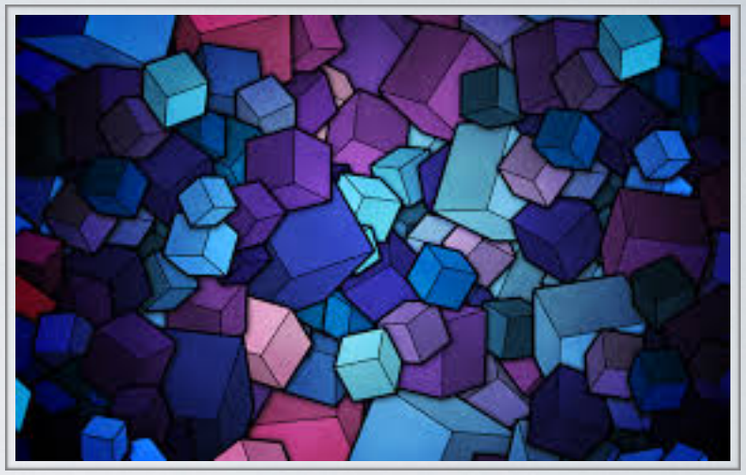

- Abstraction of a data structure
- Specifies "functionality"
  - type of data stored
  - operations it can perform
- Like a Java interface
  - Specifies name & purpose of methods
  - But not implementations

Stacks

- Stores arbitrary objects
- Operations
  - **Push**: adds object
  - **Pop**: returns *last* object
  - LIFO: last-in first-out
- Can be implemented with
  - Linked lists, arrays, …

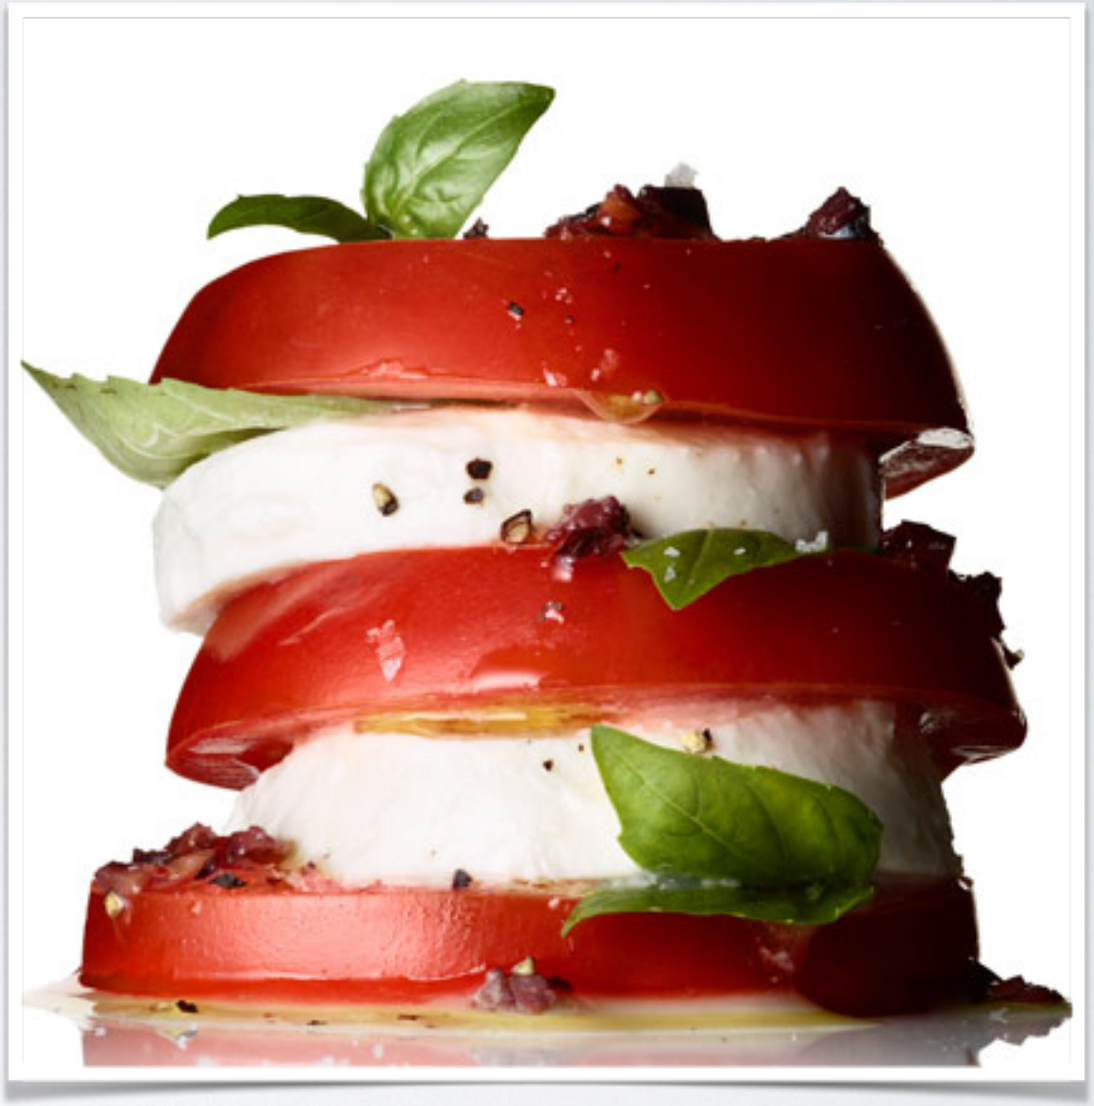

Stack ADT

- **`push`**`(object)`
  - inserts object
- `object` **`pop`**`( )`
  - returns and removes last inserted object
- `int` **`size`**`( )`
  - returns number objects in stack
- `boolean` **`isEmpty`**`( )`
  - returns **`TRUE`** if empty; **`FALSE`** otherwise

Capped-Capacity Stack

- Array-based Stack
  - Stores objects in array
  - keeps pointer to last inserted object
- Problem?
  - Size of the stack is bounded by size of array :-(

Capped-Capacity Stack

```
Stack( ):
  data = array of size 20
  count = 0
```

```
function isEmpty( ):
  return count == 0
```

```
function size( ):
      ?????
```

```
function push(object):
      ?????
```

```
function pop( ):
      ?????
```

Activity #1

Capped-capacity Stack

```
Stack( ):
  data = array of size 20
  count = 0
```

```
function isEmpty( ):
  return count == 0
```

```
function size( ):
      ?????
```

```
function push(object):
      ?????
```

```
function pop( ):
      ?????
```

Activity #1

2 min

Capped-capacity Stack

```
Stack( ):
  data = array of size 20
  count = 0
```

```
function isEmpty( ):
  return count == 0
```

```
function size( ):
      ?????
```

```
function push(object):
      ?????
```

```
function pop( ):
      ?????
```

Activity #1

1 min

Capped-capacity Stack

```
Stack( ):
  data = array of size 20
  count = 0
```

```
function isEmpty( ):
  return count == 0
```

```
function size( ):
      ?????
```

```
function push(object):
      ?????
```

```
function pop( ):
      ?????
```

Activity #1

0 min

Capped-Capacity Stack

```
Stack( ):
  data = array of size 20
  count = 0
```

O(1)

```
function size( ):
  return count
```

O(1)

```
function isEmpty( ):
  return count == 0
```

```
function push(object):
  if count < 20:
    data[count] = object
    count++
  else:
    error("overfull")
```

O(1)

```
function pop( ):
  if count == 0:
    error("empty stack")
  else:
    count--
    return data[count]
```

O(1)

Expandable Stack

- Capped-capacity stack is fast
  - but not useful in practice
- How can we design an *uncapped* Stack?
- Strategy #1: **Incremental**
  - increase size of array by constant **c** when full
- Strategy #2: **Doubling**
  - double size of array when full

Arrays can't be resized!
Can only be copied

Expandable Stack

```
Stack( ):
  data = array of size 20
  count = 0
  capacity = 20
```

What is the runtime?

```
function push(object):
  data[count] = object
  count++
  if count == capacity
    new_capacity = capacity + c /* incremental */
                 = capacity * 2 /* doubling */
    new_data = array of size new_capacity
    for i = 0 to capacity - 1
      new_data[i] = data[i]
    capacity = new_capacity
    data = new_data
```

Expandable Stack

```
function push(object):
  data[count] = object
  count++
  if count == capacity
    new_capacity = capacity + c /* incremental */
                 = capacity * 2 /* doubling */
    new_data = array of size new_capacity
    for i = 0 to capacity - 1
      new_data[i] = data[i]
    capacity = new_capacity
    data = new_data
```

- Runtime when not expanding is `O(1)` & runtime when expanding is `O(n)`
- When does it expand?
  - after `n` pushes, where `n` is capacity of array

Incremental & Doubling

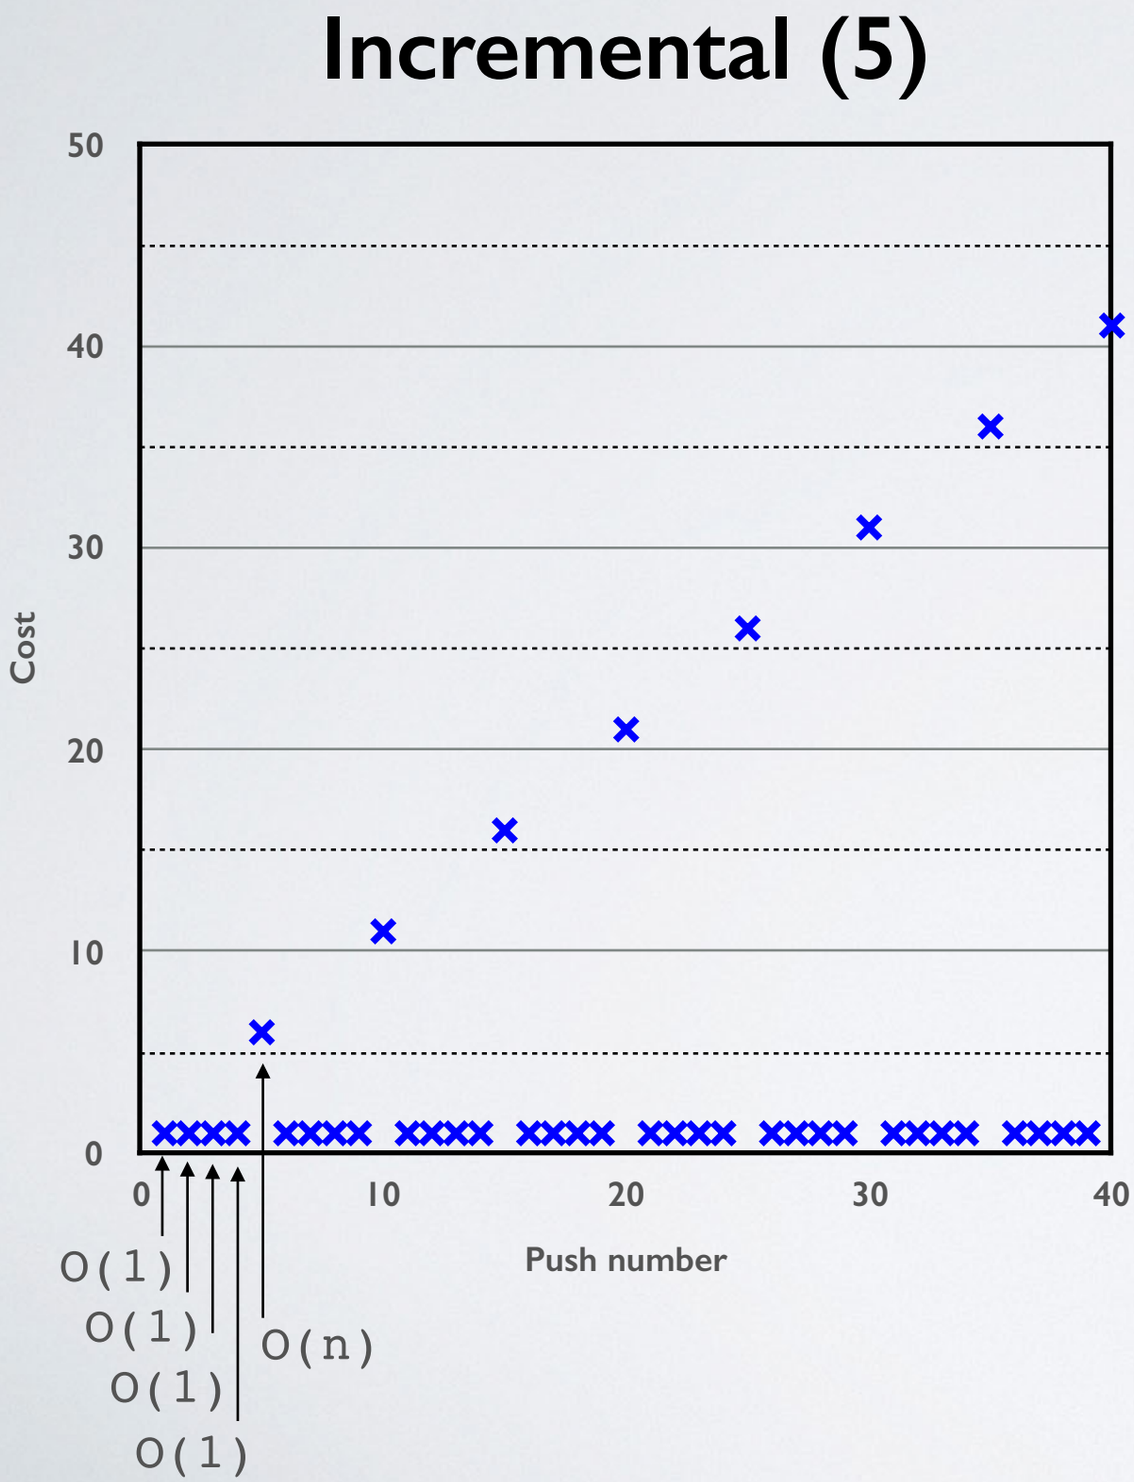

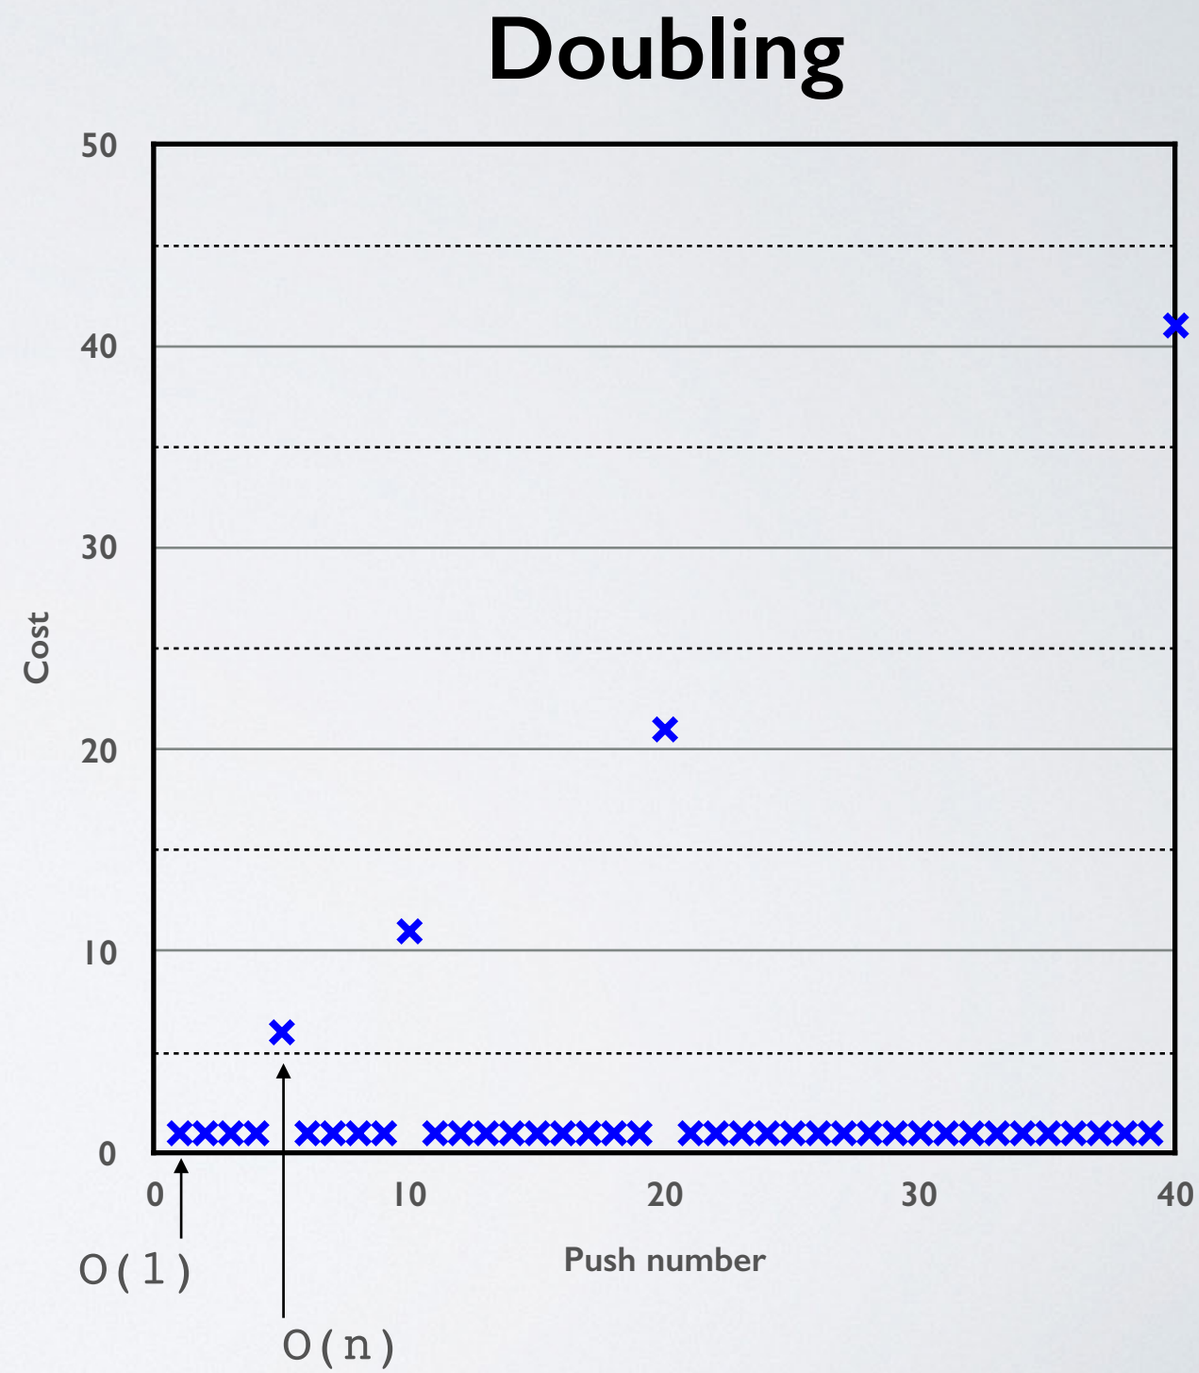

Incremental & Doubling

- What are the *worst-case* runtimes?
  - incremental: `O(n)`
  - doubling: `O(n)`
- But are they really the same?

What's going on?

Expandable Stack

```
Stack( ):
   data = array of size 20
   count = 0
   capacity = 20
```

Run time depends on count which depends on # of *previous* pushes

```
function push(object):
   data[count] = object
   count++
   if count == capacity
      new_capacity = capacity + c /* incremental */
                   = capacity * 2 /* doubling */
      new_data = array of size new_capacity
      for i = 0 to capacity - 1
         new_data[i] = data[i]
      capacity = new_capacity
      data = new_data
```

Incremental & Doubling

- Worst-case analysis overestimates runtime
  - for algorithms that are fast *most* of time…
  - …and slow *some* of the time
- For these algorithms we need an alternative
  - Amortized analysis!

Measure cost on *sequence* of calls not a single call!

Towards Amortized Analysis

- For certain algorithms it's better to measure
  - *total* running time on *sequence* of calls
  - instead of measuring on a single call
  - `S(n)`: total #calls on *sequence* of `n` calls
  - **Not runtime on a single input of size n**
- For a stack
  - `S(n)`: cost push `#1` + cost push `#2` + … + cost push `#n`

Amortized Analysis

- Instead of reporting *total* cost of sequence
  - report cost of sequence *per call*

$$\boxed{\frac{S(n)}{n}}$$

Amortized Analysis of Incremental

Amortized Analysis of Incremental

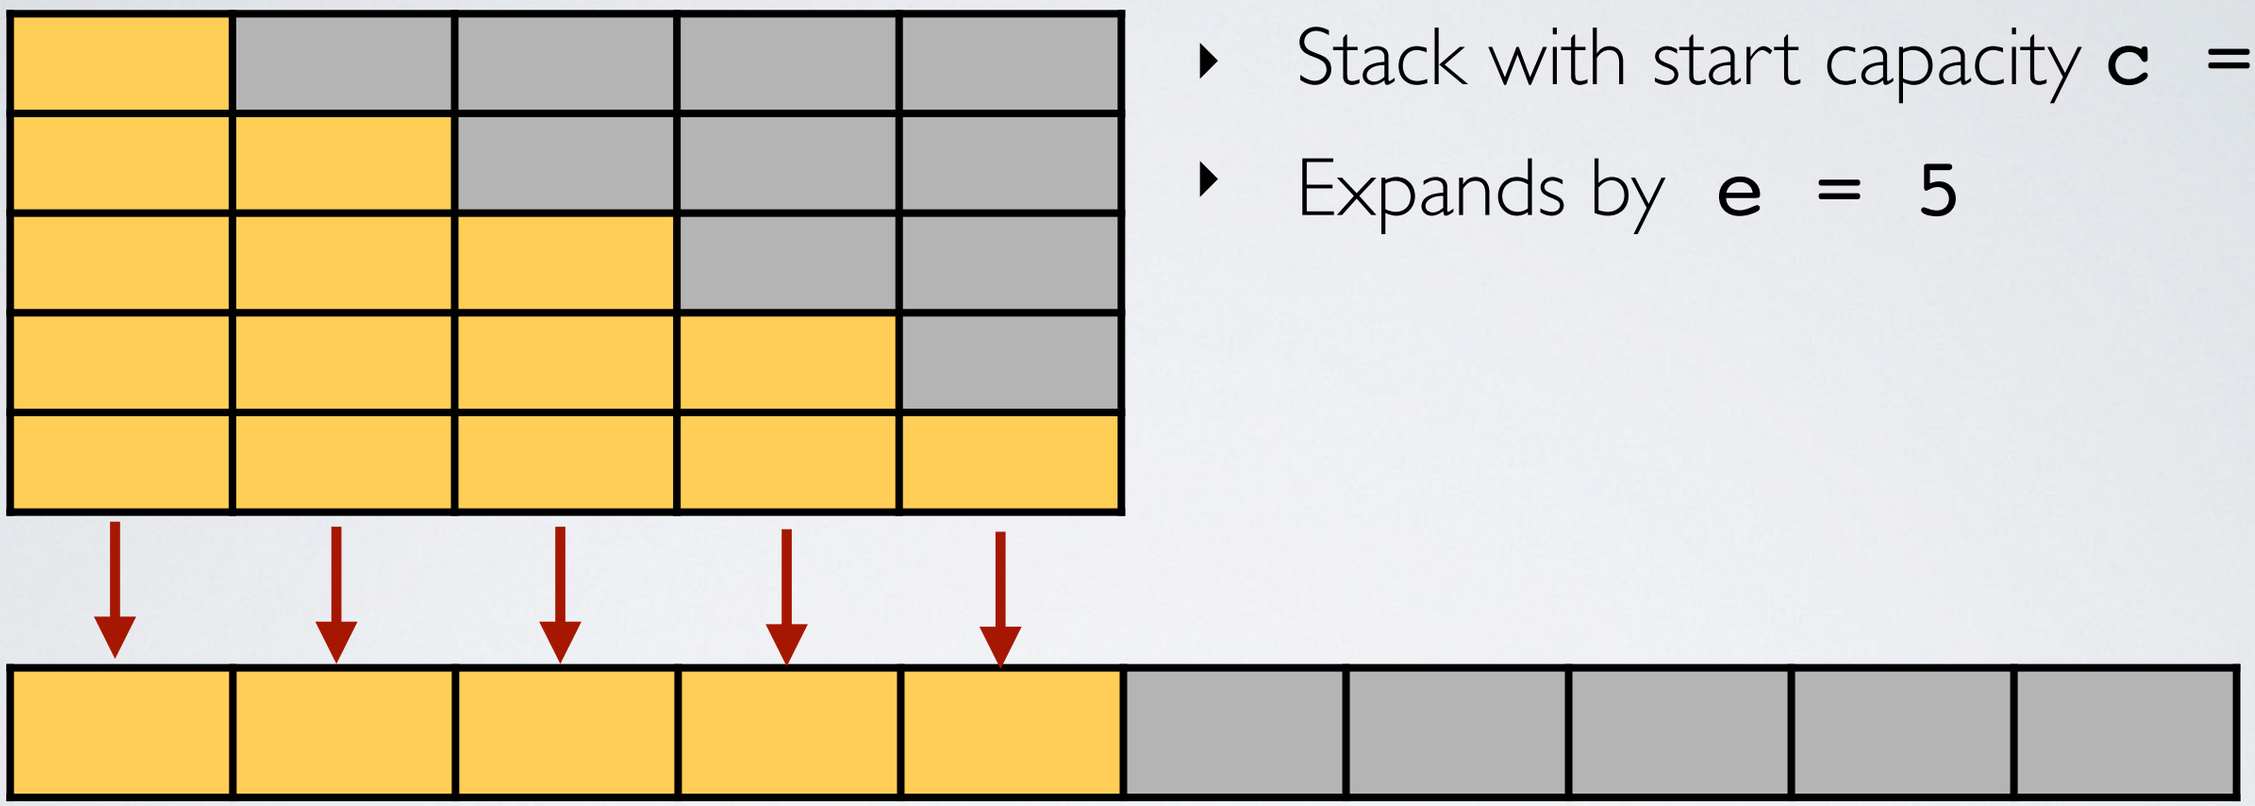

- Stack with start capacity `c = 5`
- Expands by `e = 5`

- `5`th push brings to capacity
  - Objects copied to new array of size `c+e = 5+5 = 10`
  - Cost per push over `5` pushes?

Amortized Analysis of Incremental

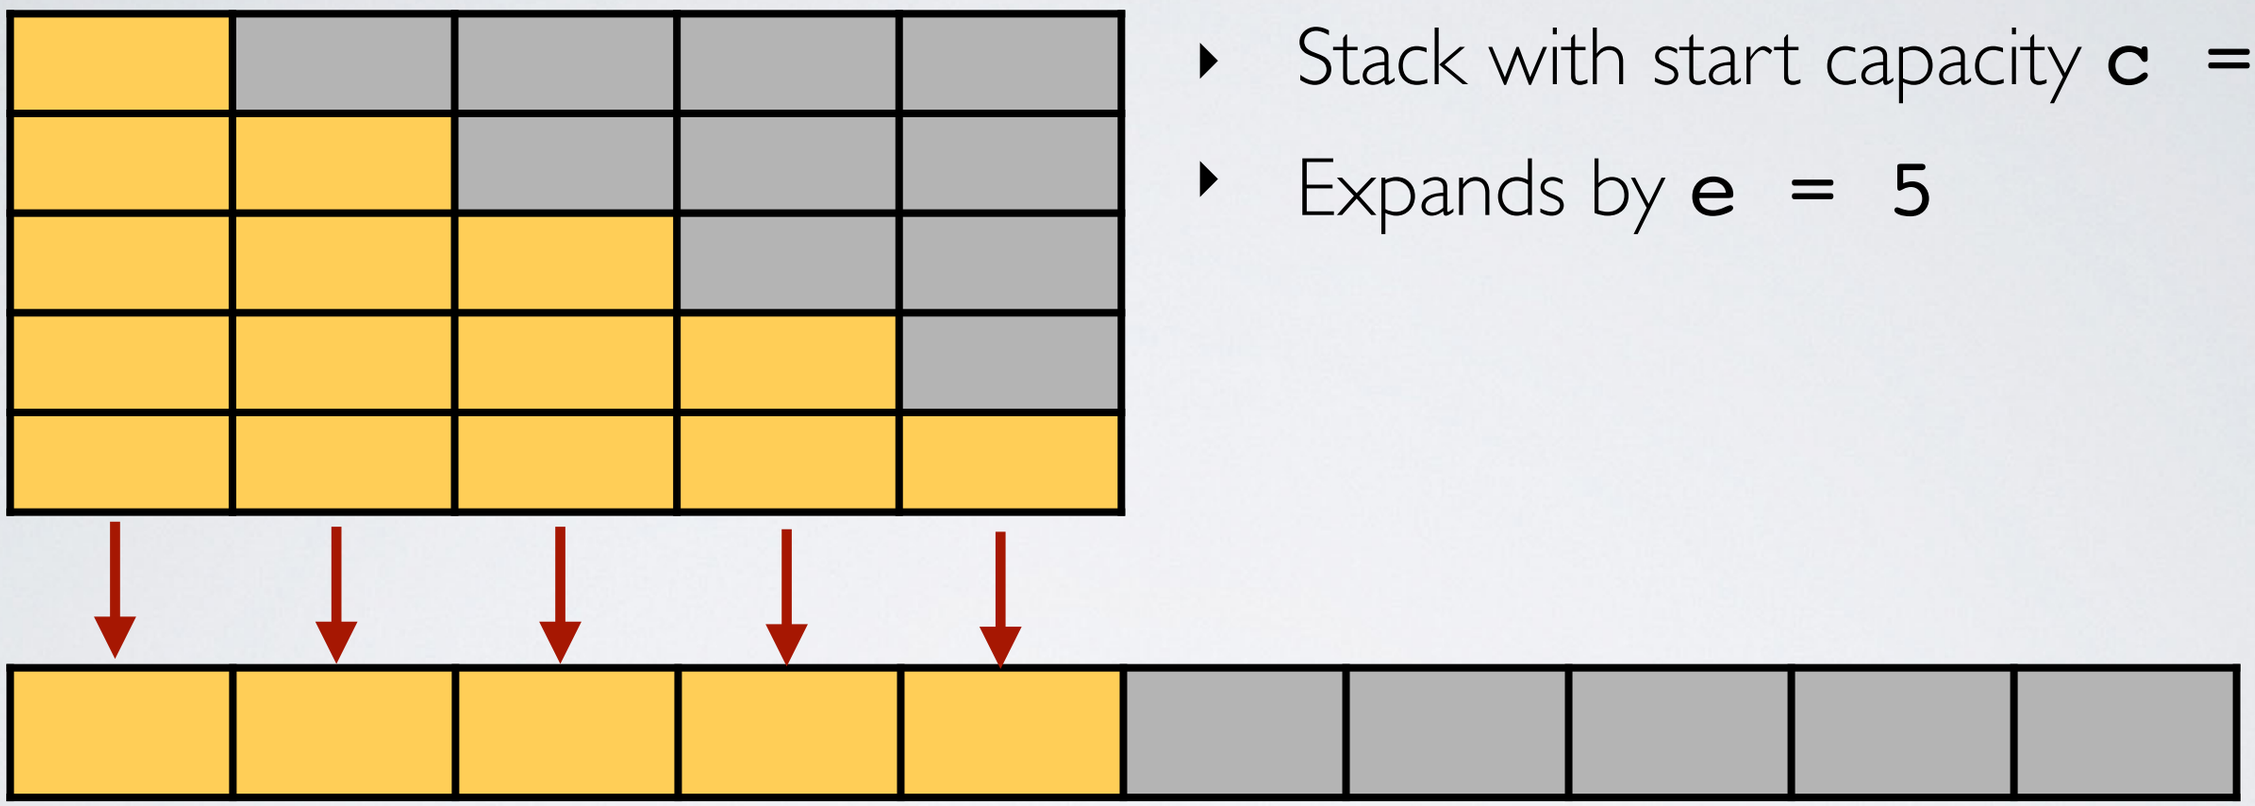

- Stack with start capacity `c = 5`
- Expands by `e = 5`

$$\frac{S(n)}{n} = \frac{c + c}{c} = \frac{5 + 5}{5} = 2$$

pushes **expansion**

Is each push `O(1)`?

Amortized Analysis of Incremental

- What if we push `10` objects?

$$\frac{S(n)}{n} = \frac{c + c + e + (c + e)}{10}$$

1st batch of pushes

1st expansion

2nd batch of pushes

2nd expansion

pushes

expansions

c=5
e=5

Amortized Analysis of Incremental

- What if we push `10` objects?

$$\frac{S(n)}{n} = \frac{c + c + e + (c + e)}{10}$$

$$= \frac{c + e + c + (c + e)}{10}$$

$$= \frac{10 + 5 + (5 + 5)}{10}$$

$$= 2.5$$

pushes

expansions

c=5
e=5

Amortized Analysis of Incremental

$$\frac{S(10)}{10} = \frac{c+e+c+(c+e)}{10} = \frac{10+5+10}{10} = \frac{25}{10} = 2.5$$

$$\frac{S(15)}{15} = \frac{c+e+e+c+(c+e)+(c+e+e)}{15} = \frac{15+5+10+15}{15} = \frac{45}{15} = 3$$

$$\boxed{\frac{S(20)}{20} = ?}$$

pushes

expansions

Activity #2

c=5
e=5

Amortized Analysis of Incremental

$$\frac{S(10)}{10} = \frac{c+e+c+(c+e)}{10} = \frac{10+5+10}{10} = \frac{25}{10} = 2.5$$

$$\frac{S(15)}{15} = \frac{c+e+e+c+(c+e)+(c+e+e)}{15} = \frac{15+5+10+15}{15} = \frac{45}{15} = 3$$

$$\boxed{\frac{S(20)}{20} = ?}$$

pushes

expansions

Activity #2

1 min

c=5
e=5

Amortized Analysis of Incremental

$$\frac{S(10)}{10} = \frac{c+e+c+(c+e)}{10} = \frac{10+5+10}{10} = \frac{25}{10} = 2.5$$

$$\frac{S(15)}{15} = \frac{c+e+e+c+(c+e)+(c+e+e)}{15} = \frac{15+5+10+15}{15} = \frac{45}{15} = 3$$

$$\boxed{\frac{S(20)}{20} = ?}$$

pushes

expansions

Activity #2

O min

c=5
e=5

Amortized Analysis of Incremental

$$\frac{S(10)}{10} = \frac{c+e+c+(c+e)}{10} = \frac{10+5+10}{10} = \frac{25}{10} = 2.5$$

$$\frac{S(15)}{15} = \frac{c+e+e+c+(c+e)+(c+e+e)}{15} = \frac{15+5+10+15}{15} = \frac{45}{15} = 3$$

$$\frac{S(20)}{20} = \frac{c+e+e+e+c+(c+e)+(c+e+e)+(c+e+e+e)}{20}$$

$$= \frac{20+5+10+15+20}{20}$$

$$= \frac{70}{20}$$

$$= 3.5$$

pushes

expansions

c=5
e=5

Amortized Analysis of Incremental

$$S(n) = c + e + \ldots + e + c + (c + e) + (c + 2e) + (c + 3e) + \ldots$$

$$= n + c + (c + e) + (c + 2e) + (c + 3e) + \ldots$$

To make things simpler, let's assume

`e = c`

$$= n + c + 2c + 3c + 4c + \ldots + \frac{n}{c} \cdot c$$

# of expansions

(1 expansion per `c` (or `e`) pushes)

Amortized Analysis of Incremental

n pushes

cost of exp. # n/c

$$S(n) = n + c + 2c + 3c + \cdots + \frac{n}{c} \cdot c$$

$$= n + c \cdot \left(1 + 2 + \cdots + \frac{n}{c}\right)$$ **factoring out c**

$$= n + c \cdot \frac{1}{2} \cdot \left(\frac{n}{c}\left(\frac{n}{c} + 1\right)\right)$$ **using:**

$$\boxed{(1 + 2 + \cdots + k) = \frac{k \cdot (k+1)}{2}}$$

$$= n + \frac{n^2/c + n}{2}$$ **distributing & simplifying:**

$$= O(n^2)$$

$$\boxed{\frac{S(n)}{n} = O(n)}$$

Amortized Analysis of Incremental

- Summary
  - Total cost of `n` pushes: $S(n) = O(n^2)$
  - Amortized cost of `n` pushes: $S(n)/n = O(n)$

Amortized Analysis of Double

Amortized Analysis of Doubling

- Doubling stack with initial capacity **`c=5`**?

cost of pushes

$$\frac{S(n)}{n} = \frac{S(5)}{5} = \frac{5+5}{5} = 2$$

cost of exp

$$\frac{S(n)}{n} = \frac{S(10)}{10} = \frac{10+5+10}{10} = 2.5$$

cost of exp #2

$$\frac{S(n)}{n} = \frac{S(20)}{20} = \frac{20+5+10+20}{20} = 2.75$$

cost of exp #3

Amortized Analysis of Doubling

cost of n pushes

cost of last exp

cost of second to last exp

$$S(n) = n + n + \frac{n}{2} + \frac{n}{4} + \cdots + \frac{n}{2^{k-1}}$$

cost of exp #1

$$= n + n \cdot \left(1 + \frac{1}{2} + \frac{1}{4} + \cdots + \frac{1}{2^{k-1}}\right)$$

$$< n + n \cdot 2$$

using: $\lim_{k\to\infty} \sum_{i=0}^{k} \frac{1}{2^i} = 2$

$$= 3n$$

Assume:
c=2
n=2^k

$$\frac{S(n)}{n} = O(1)$$

Amortized Analysis

- Summary for Incremental
  - Total cost of `n` pushes: `S(n) = O(n²)`
  - Amortized cost of `n` pushes: `S(n)/n = O(n)`
- Summary for Doubling
  - Total cost of `n` pushes: `S(n) = O(n)`
  - Amortized cost of n pushes: `S(n)/n = O(1)`

Expandable Queue

Queue ADT

- **`enqueue`**`(object)`:
  - inserts object
- `object` **`dequeue`**`( )`
  - returns and removes first inserted object
- `int` **`size`**`( )`
  - returns number objects in queue
- `boolean` **`isEmpty`**`( )`
  - returns **`TRUE`** if empty; **`FALSE`** otherwise

Expandable Queue

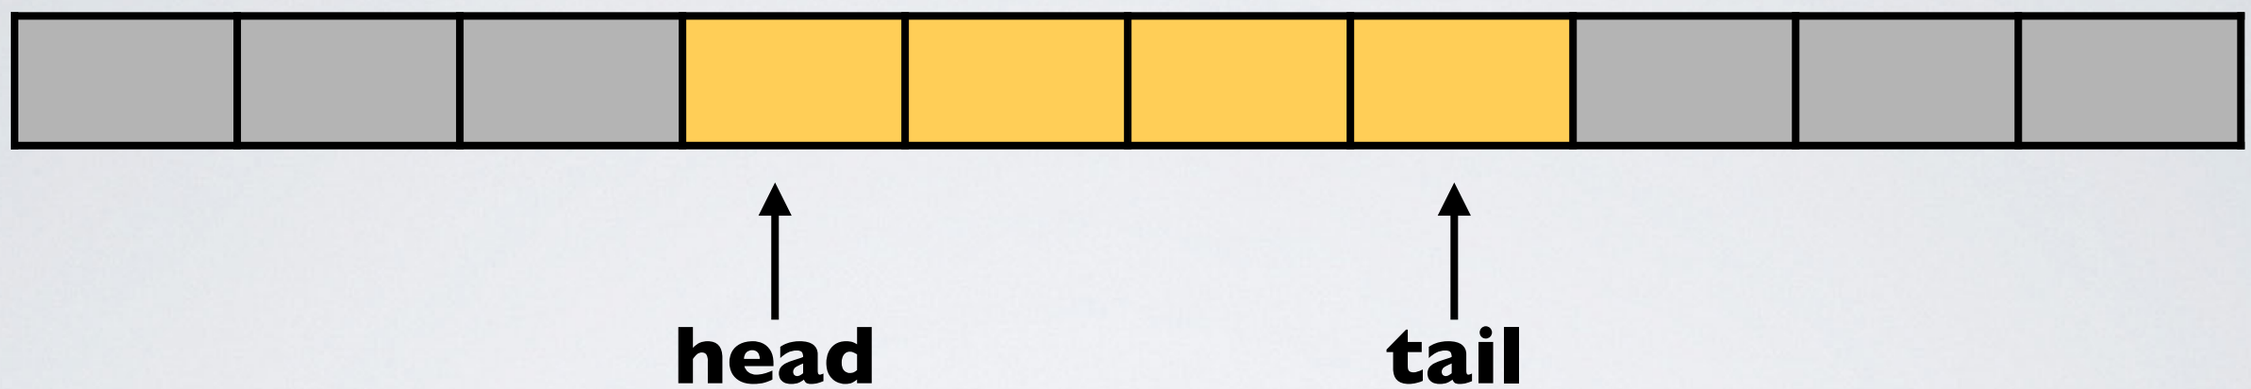

- Can be implemented with expandable array
  - need to keep track of head and tail
- What happens when tail reaches end?
  - Is the queue full?
- So when should we expand array?

Expandable Queue

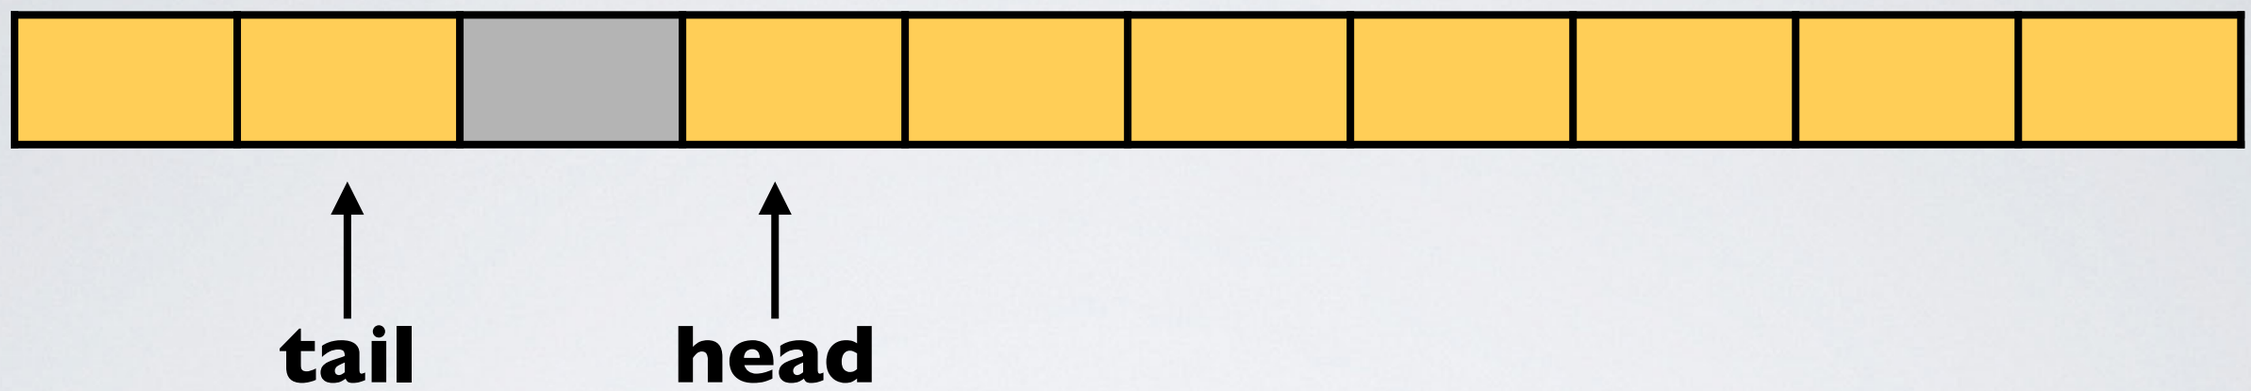

- Wrap around until array is completely full
- When expanding re-order objects properly

Expandable Queue

```
function enqueue(object):
  if size == capacity
    double array and copy contents
    reset head and tail pointers
  data[tail] = object
  tail = (tail + 1) % capacity
  size++
```

$$\frac{S(n)}{n} = O(1)$$

```
function dequeue( ):
  if size == 0
    error("queue empty")
  element = data[head]
  head = (head + 1) % capacity
  size--
  return element
```